

Standard Specifications

Housing	White Enamel Steel Pan
Trim	ABF Molded Trim (Specify Finish)
Lens	White Translucent Acrylic Halo Effect (Spilled Light Effect)
Ballast	<i>i</i> 120 Volt/60Hz Magnetic NPF <i>ii</i> 120 Volt/60Hz Electronic NPF <i>iii</i> 120/277 Volt-50/60Hz Electronic HPF Fluorescent Cold Weather Start (-30°C)
Lamp(s)	Lamp(s) Included
UL Label	Damp Location Listed

146 Series

New!




-5
Black



Custom Option Specifications

Hb	High Power Factor
FF	Flicker Free 13W (27K) Lamp(s)
Cx	Custom Wattage
ES	Energy Star
277	277 Volts*
DIM	Dimming Ballast*
EMB2	Remote Emergency Ballast
27K	27K Bulb
35K	35K Bulb
41K	41K Bulb
50K	50K Bulb
65K	65K Bulb
NL	No Lamps



146


Diameter 17.5"

Depth 3.5"

Replacement Parts

LENS-1461	Replacement White Acrylic Lens (Specify Trim Color)
------------------	--

Available Finishes

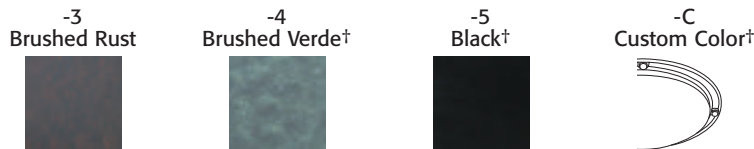

Ceiling

Product Family	Lens Type	Finish	Wattage	Options*
146	1			
146	1 - White Translucent Acrylic	3 - Brushed Rust 4 - Brushed Verdet 5 - Black C - Custom Finish†	13 - (1) 13 Watt Twin Tube (i) 13QE - (1) 13 Watt Quad (ii) 18 - (2) 9 Watt Twin Tube (ii) 18QE - (1) 18 Watt Quad (ii) 213QE - (2) 13 Watt Quad (ii) 26 - (2) 13 Watt Twin Tube (i) 26QE - (1) 26 Watt Quad (iii) 36QE - (2) 18 Watt Quad (ii)	Hb - High Power Factor* FF - Flicker Free Lamps* ES - Energy Star* (Indoor Only) EMB2 - Remote Emergency Ballast FN - Matching Finial (Adds .75" to Depth) DIM - Dimming Ballast* 277 - 277 Volts*

*Not available in all wattages, please call factory.
†Additional lead times may apply.