

Standard Specifications

- Housing** Finished Spun Steel (Specify Finish)
- Lens** Translucent UV Stabilized Acrylic
- Ballast**
 - i 120 Volt/60Hz Magnetic NPF
 - ii 120 Volt/60Hz Electronic NPF
 - iii 120/277 Volt-50/60Hz Electronic HPF**Fluorescent Cold Weather Start (-30°C)**
- Lamp(s)** Lamp(s) Provided
- UL Label** Damp Location Listed

196, 197 Series




Custom Option Specifications

- Hb** High Power Factor
- FF** Flicker Free 13W (27K) Lamp(s)
- Cx** Custom Wattage
- ES** Energy Star
- 277** 277 Volts*
- DIM** Dimming Ballast*
- EMB1** Emergency Ballast
- 27K** 27K Bulb
- 35K** 35K Bulb
- 41K** 41K Bulb
- 50K** 50K Bulb
- 65K** 65K Bulb
- NL** No Lamps

Replacement Parts


- LENS-1961** | 17" Replacement White Acrylic Lens
- LENS-1971** | 21" Replacement White Acrylic Lens

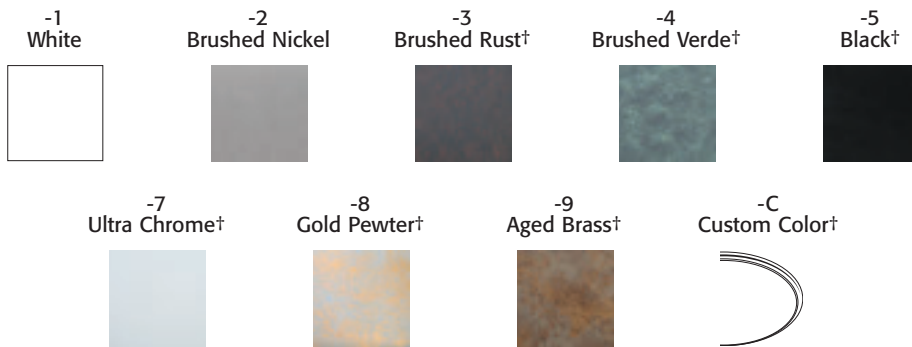

Available Finishes



196	Diameter	17.0"	Depth	3.0"
197	Diameter	21.0"	Depth	3.0"

Wall or Ceiling



Product Family	Lens Type	Lens Size	Wattage	Options*
<div style="border: 1px solid black; padding: 5px; text-align: center;">17"</div> 196 	1 - White Translucent Acrylic	1 - White 2 - Brushed Nickel 3 - Brushed Rust† 4 - Brushed Verde† 5 - Black† Premium Finishes† 7 - Ultra Chromet 8 - Gold Pewter† 9 - Aged Brass† C - Custom Finish†	196/197 18 - (2) 9 Watt Twin Tube (i) 26 - (2) 13 Watt Twin Tube (i) 213QE - (2) 13 Watt Quad (ii) 22Circ - 22 Watt Circline (ii) 26QE - (1) 26 Watt Quad (iii) 39▲ - (3) 13 Watt Twin Tube (i) 313QE - (3) 13 Watt Quad (ii) 32Circ▲ - (1) 32 Watt Circline (ii) 36QE - (2) 18 Watt Quad (ii) 54Circ▲ - 32/22 Watt Circline (ii) 52QE - (2) 26 Watt Quad (iii) <hr/> 197 52QE▲ - (2) 26 Watt Quad (iii) 78QE■ - (3) 26 Watt Quad (iii)	Hb - High Power Factor* FF - Flicker Free Lamps* ES - Energy Star* EMB1 - Emergency Ballast* DIM - Dimming Ballast* 277 - 277 Volts*
<div style="border: 1px solid black; padding: 5px; text-align: center;">21"</div> 197 				

*Not available in all wattages, please call factory.
†Additional lead times may apply.

▲ - Must use a minimum of 17" size
■ - Must use a minimum of 21" size