



52012 Series



White/Chrome

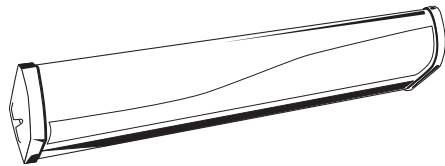

Wall or Ceiling



Wattage
220/34Z

Length 24.25"
Width 3.1875"
Depth 5.1875"

Wattage
230/50Z

Length 36.25"
Width 3.1875"
Depth 5.1875"

Wattage
240/64Z

Length 48.25"
Width 3.1875"
Depth 5.1875"

Standard Specifications

- Housing** | White Finished Cold Rolled Steel
- Lens** | UV Stabilized Smooth White Acrylic
- Ballast** | *i* 120 Volt/60Hz Magnetic NPF
ii 120 Volt/60Hz Electronic NPF
iii 120/270 Volt-50/60Hz Electronic HPF
Fluorescent Cold Weather Start (-30°C)
- Lamp(s)** | Lamp(s) Not Included
- UL Label** | Damp Location Listed

Custom Option Specifications

- Hb** | High Power Factor
- 277** | 120/277V/60Hz Electronic (High Power Factor Ballast)
- CO** | Convenience Outlet
- PCH** | Pull Chain
- WE** | White End Caps
- Cx** | Custom Wattage
- ES** | Energy Star
- 277** | 277 Volts*
- DIM** | Dimming Ballast*
- EMB1** | Integral Emergency Ballast
- EMB2** | Remote Emergency Ballast
- NL** | No Lamps

Replacement Parts

- LENS-5201-24** | Replacement 24" White Lens
- LENS-5201-36** | Replacement 36" White Lens
- LENS-5201-48** | Replacement 48" White Lens

Available End Cap Finishes



Product Family	Lens Type	Finish	Wattage	Options*
520	1			
520	1 - Smooth White Acrylic Lens	1 - White End Caps 2 - Chrome End Caps	26 - (2) 13 Watt Twin Tube (<i>i</i>) 34Z - (2) 17 Watt (T-8) Elec (<i>ii</i>) 36QE - (2) 18 Watt Quad (<i>ii</i>) 50Z - (2) 25 Watt (T-8) Elec (<i>iii</i>) 52QE - (2) 26 Watt Quad (<i>iii</i>) 64Z - (2) 32 Watt (T-8) Elec (<i>iii</i>) 213QE - (2) 13 Watt Quad (<i>ii</i>) 220 - (2) 20 Watt (T-12) Mag (<i>i</i>) 230 - (2) 30 Watt (T-12) Mag (<i>i</i>) 240 - (2) 34 Watt (T-12) Elec (<i>iii</i>)	Hb - High Power Factor CO - Convenience Outlet PCH - Pull Chain ES - Energy Star (Indoor & T-8 Only) EMB1 - Integral Emergency Ballast EMB2 - Remote Emergency Ballast DIM - Dimming Ballast* 277 - 277 Volts*