

Standard Specifications

Housing	White Finished Cold Rolled Steel
Lens	UV Stabilized Clear Prismatic Acrylic
Ballast	<i>ii</i> 120 Volt/60Hz Electronic NPF <i>iii</i> 120/277 Volt 50/60Hz Electronic HPF
Lamp(s)	Lamp(s) Not Included
UL Label	Damp Location Listed

57191 Series



White




Custom Option Specifications

Hb	High Power Factor
277	277V/60Hz (High Power Factor Ballast)
3P	3-Way Pull Chain
Cx	Custom Wattage
ES	Energy Star
277	277 Volts*
EMB1	Integral Emergency Ballast
EMB2	Remote Emergency Ballast
NL	No Lamps

Replacement Parts

LENS-5719-24	Replacement 24" Clear Lens
LENS-5719-48	Replacement 36" Clear Lens
LENS-5719-96	Replacement 48" Clear Lens

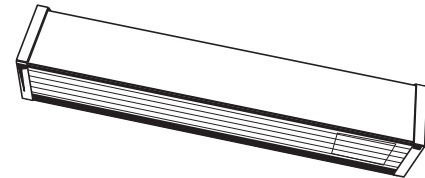

Wall

Wattage 34Z

Length	24.25"
Width	4.5"
Depth	4.395"

Wattage 64Z

Length	48.25"
Width	4.5"
Depth	4.395"

Wattage 96Z/128Z

Length	48.25"
Width	4.5"
Depth	4.395"

Product Family	Lens Type	Finish	Wattage	Options*
571	9	1		
571	9 - Clear Prismatic Acrylic	1 - White	34Z - (2) 17 Watt (T-8) Elec (<i>ii</i>) 64Z - (2) 32 Watt (T-8) Elec (<i>iii</i>) 96Z - (3) 32 Watt (T-8) Elec (<i>iii</i>) 128Z - (4) 32 Watt (T-8) Elec (<i>iii</i>)	277 - 277 Volt Ballast Hb - High Power Factor 3P - 3-Way Pull Chain (includes Divider) ES - Energy Star (Indoor & T-8 Only) EMB1 - Integral Emergency Ballast EMB2 - Remote Emergency Ballast

*Not available in all wattages, please call factory.
†Additional lead times may apply.