


59818 Series




Marble/Smooth White

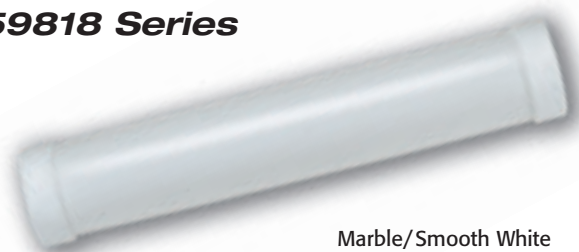


59814 Series



Verde/Smooth White

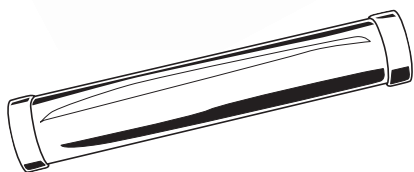

Wall




Standard Specifications

Housing	Finished Cold Rolled Steel
Lens	UV Stabilized Smooth White Acrylic
Ballast	<i>i</i> 120 Volt/60Hz Magnetic NPF <i>ii</i> 120 Volt/60Hz Electronic NPF <i>iii</i> 120/277 Volt-50/60Hz Electronic HPF Fluorescent Cold Weather Start (-30°C)
Lamp(s)	Lamp(s) Not Included (T8)
Lamp(s)	Lamp(s) Included (CFL only)
UL Label	Damp Location Listed

Custom Option Specifications

Hb	High Power Factor
277	277V/60Hz (High Power Factor Ballast)
Cx	Custom Wattage
ES	Energy Star
277	277 Volts*
DIM	Dimming Ballast*
EMB2	Remote Emergency Ballast
27K	27K Bulb
35K	35K Bulb
41K	41K Bulb
50K	50K Bulb
65K	65K Bulb
NL	No Lamps

Available End Cap Finishes

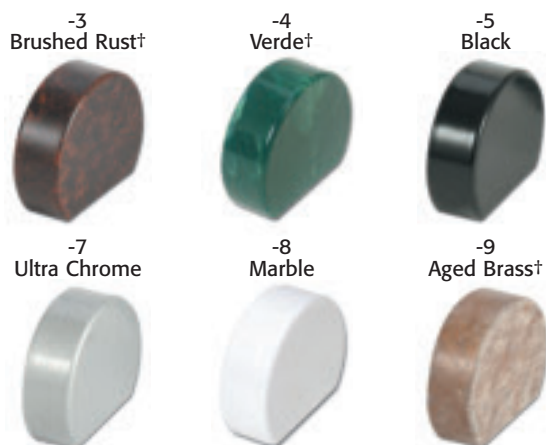

Wattage 213QE, 36QE, 52QE	Wattage 34Z	Wattage 50Z	Wattage 64Z
Length 19.625"	Length 25.625"	Length 37.625"	Length 49.625"
Width 4.75"	Width 4.75"	Width 4.75"	Width 4.75"
⊕Depth 4.0"	⊕Depth 4.0"	⊕Depth 4.0"	⊕Depth 4.0"

Product Family	Lens Type	Finish	Wattage	Options*
598	1			
598	1 - Smooth White Acrylic	3 - Brushed Rust† 4 - Brushed Verdet† 5 - Black 7 - Ultra Chrome 8 - Marble 9 - Aged Brass†	18 - (2) 9 Watt Twin Tube (ii) 26 - (2) 13 Watt Twin Tube (i) 36QE - (2) 18 Watt Quad (ii) 52QE - (2) 26 Watt Quad (iii) 213QE - (2) 13 Watt Quad (ii) 34Z - (2) 17 Watt (T-8) Elec (ii) 50Z - (2) 25 Watt (T-8) Elec (ii) 64Z - (2) 32 Watt (T-8) Elec (ii)	Hb - High Power Factor ES - Energy Star (Indoor) EMB2 - Remote Emergency Ballast DIM - Dimming Ballast* 277 - 277 Volts*