

HID Security

710 Series



711 Series



712 Series




Standard Specifications

- Housing** Die-Cast Aluminum (Specify Finish)
Lens Molded Heat Treated Glass, Sandblasted
Ballast *i* 120 Volt/60Hz Magnetic NPF
ii 120 Volt/60Hz Electronic NPF
iii 120/277 Volt-50/60Hz Electronic HPF
Fluorescent Cold Weather Start (-30°C)
iv 120 Volt/60Hz Reactor Type NPF
v 120 Volt/60Hz HX HPF
vi 120 Volt/60Hz CWA HPF
 NOTE: All metal halide fixtures are IESA [pulse start] compliant
Lamp(s) UL Label Lamp(s) Included
 †Wet Location Listed

Custom Option Specifications

- 277** 277 Volt Ballast
PE Photocell (120 Volt Only)
PE2 Photocell (208-277 Volt)
277 277 Volts*
DIM Dimming Ballast*
EMB1 Emergency Battery Backup
EMB2 Remote Emergency Ballast
27K 27K Bulb
35K 35K Bulb
41K 41K Bulb
50K 50K Bulb
65K 65K Bulb
NL No Lamps

Ceiling or Wall




710/711 712

Diameter 15.0" 15.0"
 Depth 9.25" 8.75"


710

711

712

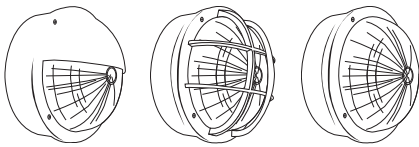

Available Finishes

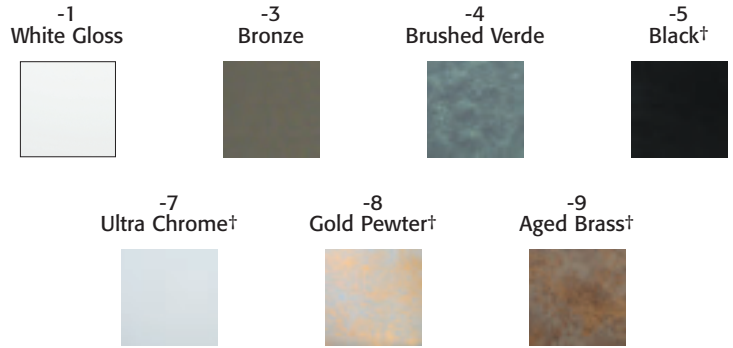

| Product Family | Lens Type | Lens Size | Wattage | Options* |
|----------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | 6 | | | |
| 710 711 712 | 6 - Sandblasted Glass | 1 - White Gloss 3 - Bronze 4 - Brushed Verdet 5 - Black Premium Finishes† 7 - Ultra Chromet 8 - Gold Pewter† 9 - Aged Brass† | 9 - (1) 9 Watt Twin Tube (<i>i</i>) 13 - (1) 13 Watt Twin Tube (<i>i</i>) 13QE - (1) 13 Watt Quad (<i>ii</i>) 18 - (2) 9 Watt Twin Tube (<i>i</i>) 18QE - (1) 18 Watt Quad (<i>ii</i>) 26 - (2) 13 Watt Twin Tube (<i>i</i>) 26QE - (1) 26 Watt Quad (<i>iii</i>) 213QE - (2) 13 Watt Quad (<i>ii</i>) 32TT - (1) 32 Watt Triple Tube (<i>iii</i>) 36QE - (2) 18 Watt Quad (<i>ii</i>) 42TT - (1) 42 Watt Triple Tube (<i>iii</i>) 52QE - (2) 18 Watt Quad (<i>ii</i>) 64TT - (2) 32 Watt Triple Tube (<i>iii</i>) 84TT - (2) 42 Watt Triple Tube (<i>iii</i>) 50M - (1) 50 Watt MH (MED) (<i>iv</i>) 70M - (1) 70 Watt MH (MED) (<i>iv</i>) 100M - (1) 100 Watt MH (MOG) (<i>v</i>) 150M - (1) 70 Watt MH (MOG) (<i>v</i>) 175M - (1) 70 Watt MH (MOG) (<i>v</i>) 50H - (1) 50 Watt HPS (MED) (<i>iv</i>) 70H - (1) 70 Watt HPS (MED) (<i>iv</i>) 100H - (1) 100 Watt HPS (MOG) (<i>iv</i>) 150H - (1) 150 Watt HPS (MED) (<i>iv</i>) | PE - Photocell (120V Only) PE2 - Photocell (208V-277V) EMB1 - Emergency Battery Backup* EMB2 - Remote Emergency Ballast DIM - Dimming Ballast* 277 - 277 Volts* |