

HID Security "Dark Sky"

Standard Specifications

- Housing** Die-Cast Aluminum (Specify Finish)
- Lens** Tempered Clear Glass Lens
- Ballast** *iii* 120/277 Volt-50/60Hz Electronic HPF
Fluorescent Cold Weather Start (-30°C)
iv 120 Volt/60Hz Reactor Magnetic NPF
v 120/208/240/277 Volt/60Hz Magnetic HX HPF
vi 120/208/240/277 Volt/60Hz Magnetic CWA HPF
NOTE: All metal halide fixtures are IESA [pulse start] compliant
- Lamp(s) Included**
- UL Label** †Wet Location Listed

740, 741, 742 Series




-3B
Bronze



Custom Option Specifications

- PE** Photocell (120 Volt Only) (Approved Layout)
- PE2** Photocell (208-277 Volt) (Approved Layout)
- WG** Wire Guard
- VS** Vandal Sealed (Clear Polycarbonate)
- Cx** Custom Wattage
- 277** 277 Volts*
- DIM** Dimming Ballast*
- EMB1** Integral Emergency Ballast
- EMB2** Remote Emergency Ballast
- 27K** 27K Bulb
- 35K** 35K Bulb
- 41K** 41K Bulb
- 50K** 50K Bulb
- 65K** 65K Bulb
- NL** No Lamps

Dark Sky Compliant




Wall




Replacement Parts

- LENS-740** Replacement Clear Glass Lens (Medium)
- LENS-741** Replacement Clear Glass Lens (Large)
- LENS-742** Replacement Clear Glass Lens (Extra Large)

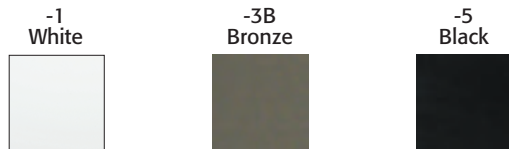Available Finishes



740 - Medium	741 - Large	742 - Extra Large
Height 9.125"	Height 9.125"	Height 9.125"
Width 14.25"	Width 18.25"	Width 18.25"
Depth 11.625"	Depth 13.75"	Depth 17.125"

Product Family	Lens Type	Lens Size	Wattage	Options*	
<p>740 Medium</p>  <p>741 Large</p>  <p>742 Extra Large</p> 	9	<p>9 - Clear Glass</p>	<p>1 - White†</p> <p>3B -Bronze</p> <p>5 - Black†</p>	<p>740</p> <p>9 - (1) 9 Watt Twin Tube (i) 13 - (1) 13 Watt Twin Tube (i) 13QE - (1) 13 Watt Quad (ii) 18 - (2) 9 Watt Twin Tube (i) 18QE - (1) 18 Watt Quad (ii) 26 - (2) 13 Watt Twin Tube (i) 26QE - (1) 26 Watt Quad (iii) 36QE - (2) 18 Watt Quad (ii) 213QE - (2) 13 Watt Quad (ii) 32TT - (1) 32 Watt Triple Tube (iii) 42TT - (1) 42 Watt Triple Tube (iii) 70M - (1) 70 Watt MH (MED) (iv) 100M - (1) 100 Watt MH (MED) (v) 175M - (1) 175 Watt MH (MOG) (v) 50H - (1) 50 Watt HPS (MED) (iv) 70H - (1) 70 Watt HPS (MED) (iv) 100H - (1) 100 Watt HPS (MOG) (iv) 150H - (1) 150 Watt HPS (MEDG) (iv)</p> <p>741</p> <p>26QE - (1) 26 Watt Quad (iii) 52QE - (2) 18 Watt Quad (ii) 32TT - (1) 32 Watt Triple Tube (iii) 42TT - (1) 42 Watt Triple Tube (iii) 64TT - (2) 32 Watt Triple Tube (iii) 70TT - (1) 70 Watt Triple Tube Electronic (iii) 84TT - (2) 42 Watt Triple Tube (iii) 100M - (1) 100 Watt MH (MOG) (v)</p> <p>742</p> <p>150M - (1) 70 Watt MH (MOG) (v) 250M - (1) 250 Watt MH (MOG) (vi) 250H - (1) 250 Watt HPS (MOG) (vi)</p> <p>140TT - (2) 70 Watt Triple Tube Electronic (iii) 400H - (1) 400 Watt HPS (MOG) (vi) 400M - (1) 400 Watt MH (MOG) (vi)</p>	<p>PE - Photocell (120 Volt Only)</p> <p>PE2 - Photocell (208-277 Volt)</p> <p>WG - Wire Guard</p> <p>VS - Vandal Shield (Clear Polycarbonate)</p> <p>EMB1 - Integral Emergency Ballast</p> <p>EMB2 - Remote Emergency Ballast</p> <p>DIM - Dimming Ballast*</p> <p>277 - 277 Volts*</p>

†Additional lead times may apply.

†-UL Wet Location Listed