

Standard Specifications

Housing	Bronze Die-Cast Aluminum
Lens	77793B High Impact Clear Prismatic Polycarbonate 70193B/70293B/7893B Borosilicate Molded Glass
Ballast	ii 120 Volt/60Hz Electronic NPF iii 120/277 Volt-50/60Hz Electronic HPF Fluorescent Cold Weather Start (-30°C) iv 120 Volt/60 Hz Reactor NPF v 120, 208, 220, 277Volt/60Hz - Hx NPF NOTE: All metal halide fixtures are IESA [pulse start] compliant
Lamp(s)	Lamp(s) Included
UL Label	Wet Location Listed

70193B Series New!



77793B Series



Custom Option Specifications

PE	Photocell (120 Volt only)
Cx	Custom Wattage
WG	Wire Guard (77893 only)
PE2	Photocell (208-277 Volt)
DIM	Dimming Ballast*
EMB2	Remote Emergency Ballast
27K	27K Bulb
35K	35K Bulb
41K	41K Bulb
50K	50K Bulb
65K	65K Bulb
NL	No Lamps

77893B Series







70293B Series New!




Replacement Parts

LENS-7779	Replacement Clear Polycarbonate Lens
LENS-7789	Replacement Clear Glass Lens

70193B Series **70293B Series** **77793B Series** Polycarbonate **77893B Series** Die Cast/Glass



Height 11.75"	Height 11.75"	Height 11.0"	Height 13.0"
Width 7.50"	Width 7.50"	Width 8.725"	Width 7.75"
Depth 7.375"	Depth 7.625"	Depth 5.25"	Depth 5.50"

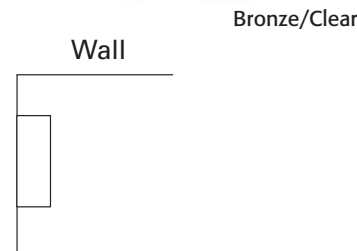

Product Family	Lens Type	Finish	Wattage	Options*
777 -Polycarbonate 778 -Die-Cast Aluminum 701 702 	9 9 - Clear Prismatic	3B 3B - Bronze	777 32TT - (1) 32 Watt Triple (iii)↑ 70H - (1) 70 Watt HPS (MED) (iv)↑ 701/702/778 26QE - (1) 26 Watt Quad (iii)↑ 52QE - (2) 26 Watt Quad (iii)↑ 32TT - (1) 32 Watt Triple (iii)↑ 42TT - (1) 42 Watt Triple (iii)↑ 64TT - (2) 30 Watt Triple (iii)↑ 84TT - (2) 42 Watt Triple (iii)↑ 70M - (1) 70 Watt MH (MED) (iv)↑ 100M - (1) 100 Watt MH (MED) (iv)↑ 70H - (1) 70 Watt HPS (MED) (iv)↑ 100H - (1) 100 Watt HPS (MED) (iv)↑ 150H - (1) 150 Watt HPS (MED) (iv)↑	PE - Photocell (120V Only) PE2 - Photocell (208-277V Only) WG - Wire Guard (77893B Only) DIM - Dimming Ballast* EMB2 - Remote Emergency Ballast