

**781 Series
New!**



FEATURE:
Down Light
Only

**782 Series
New!**



FEATURE:
Up/Down
Light




Standard Specifications

Housing	Die-Cast Aluminum
Lens	Impact Resistant Tempered Glass
Ballast	<i>i</i> 120 Volt/60Hz Magnetic NPF <i>ii</i> 120 Volt/60Hz Electronic NPF <i>iii</i> 120/277 Volt 50/60Hz Electronic HPF Fluorescent Cold Weather Start (-30°C) <i>iv</i> 120 Volt 60 Hz Reactor Magnetic NPF <i>v</i> 120/208/240/277 Volt/60 Hz Magnetic HX HPF <i>vi</i> 120/208/240/277 Volt/60 Hz Magnetic CWA HPF 60 Hz CWA Magnetic HPF
Lamp(s)	NOTE: All metal halide fixtures are IESA [pulse start] compliant Lamp(s) Included
UL Label	↑ Wet Location

Custom Option Specifications

PE	Photocell (120 Volt Only)
PE2	Photocell (208-277V)
Cx	Custom Wattage
277	277 Volts*
DIM	Dimming Ballast*
EMB2	Remote Emergency Ballast
27K	27K Bulb
35K	35K Bulb
41K	41K Bulb
50K	50K Bulb
65K	65K Bulb
NL	No Lamps

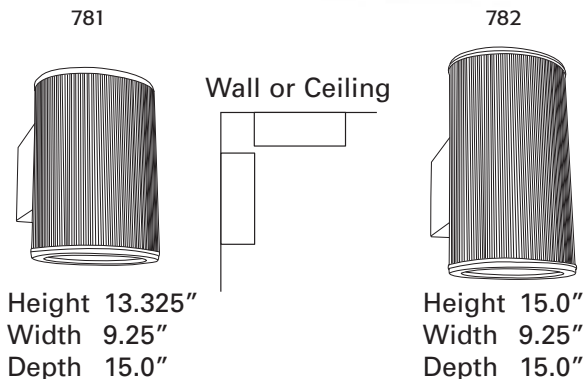

Meets All ADA Standards

Product Family	Lens Type	Finish	Wattage	Options
<p>781</p> <p>782</p>	<p>9</p> <p>9 - Clear Prismatic Acrylic</p>	<p>1</p> <p>1 - White 3B - Bronze</p>	<p>9 - (1) 9 Watt Twin Tube (i)↑ 13 - (1) 13 Watt Twin Tube (i)↑ 13QE - (1) 13 Watt Quad (ii)↑ 18 - (2) 9 Watt Twin Tube (ii)↑ 18QE - (1) 18 Watt Quad (ii)↑ 26 - (2) 13 Watt Twin Tube (i)↑ 26QE - (1) 26 Watt Quad (iii)↑ 36QE - (2) 18 Watt Quad (ii)↑ 32TT - (1) 32 Watt Triple (iii)↑ 42TT - (1) 42 Watt Triple (iii)↑ 50H - (1) 50 Watt HPS (MED) (iv)↑ 70H - (1) 70 Watt HPS (MED) (iv)↑ 100H - (1) 100 Watt HPS (MED) (iv)↑ 150H - (1) 150 Watt HPS (MED) (iv)↑ 50M - (1) 50 Watt MH (MED) (iv)↑ 70M - (1) 70 Watt MH (MED) (iv)↑ 100M - (1) 100 Watt MH (MED) (iv)↑ 150M - (1) 150 Watt MH (MED) (iv)↑ 175M - (1) 175 Watt MH (MED) (iv)↑</p>	<p>PE - Photocell (120V Only) PE2 - Photocell (208V-277V) EMB2 - Remote Emergency Ballast DIM - Dimming Ballast* 277 - 277 Volts*</p>