

Bollards

899 Series



-1 Black



IMMERSIBLE
CONCRETE BASE INCLUDED
(Does Not Require Anchor Bolts)

Height 43.00"
Diameter 7.25"

Standard Specifications

- Housing** Heavy Duty Diecast
- Lens** UV Stabilized Clear Polycarbonate
- Finish** Textured Black Finish Standard (Custom Finish Available)
- Ballast**
 - i* 120 Volt/60Hz Magnetic NPF
 - iii* 120/277 Volt/50/60Hz Electronic HPF Class P
 - Fluorescent Cold Weather Start (-30°C)**
 - iv* 120 Volt/60Hz Magnetic Reactor NPF
 - v* 120, 208, 220, 277 Volt/60Hz Magnetic HPF CWA
- Lamp(s)** Lamp(s) Included
- UL Label** †Wet Location Listed


Custom Option Specifications

- CP** Custom Paint (Call Factory) Must Specify Color
- Cx** Custom Wattage (Call Factory)
- HS** House Side Shield
- 27K** 27K Bulb
- 35K** 35K Bulb
- 41K** 41K Bulb
- 50K** 50K Bulb
- 65K** 65K Bulb
- NL** No Lamps

Replacement Parts

LENS-8995 | Replacement Clear Polycarbonate Lens

Available Finishes

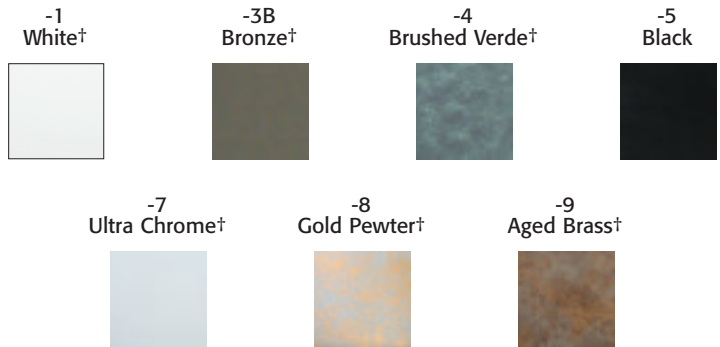

Product Family	Lens Type	Finish	Wattage	Options
899	9			
899	9 - Clear Lens	1 - Whitet 3B - Bronzet 4 - Brushed Verdet† 5 - Black Premium Finishes† 7 - Ultra Chromet† 8 - Gold Pewter† 9 - Aged Brass†	INC - 150 Watt Max Incandescent ■ 42TT - (1) 42 Watt Triple Tube Elec (iii) 57TT - (1) 57 Watt Triple Tube Elec (iii) 68C - (1) 68 Watt (CFL) (ii) 70H - (1) 70 Watt HPS (MED) (iv) 70M - (1) 70 Watt MH (MED) (v) 100H - (1) 100 Watt HPS (MED) (iv) 100M - (1) 100 Watt MH (MED) (v) 150H - (1) 150 Watt HPS (MED) (iv) 150M - (1) 150 Watt HPS (MED) (v)	HS - House Side Shield